



POWERED INFEED & OUTFEED ROLLER CONVEYOR (OPTIONAL)

- The infeed roller conveyor is driven by a 1HP motor.
- Foot switch controls roller rotation.
- Length can be made to meet customer's requirement.

SPECIFICATIONS

MODEL	YFC-30	YFC-36
Cycle speed	10~15 strokes/min	10~15 strokes/min
Cycle operation	Pneumatic	Pneumatic
Saw blade size (optional)	30"	36"
Saw arbor diameter	2"	2"
Saw blade speed	1600 rpm	1500 rpm
Dust exhaust diameter	ø4" x (2)	ø5" x (4)
Motor	15 HP (20HP optional)	25 HP
Table size	1280 x 820 mm	1460 x 880 mm
Net weight	650 kgs	1120 kgs
Gross weight	770 kgs	1300 kgs
Packing dimensions(LxWxH)	1430 x 1030 x 1650 mm	1600 x 1080 x 1950 mm

We reserve the right to modify design without prior notice.

OPTIONAL EQUIPMENT

- Sawblade
- Infeed and outfeed roller conveyor. (Length as required)
- Safety guard



No. 51, Alley 2, Lane 66, Sec. 2, Chiao Tan Rd.,
Feng Yuan Dist., Taichung 42072, Taiwan.
Tel : +886-4-2528-8863 • 2529-9403
Fax: +886-4-2525-4171
E-mail: yuhfarn@ms32.hinet.net
<http://www.yuhfarn.com.tw> • www.woodsawing.com

07.2011 / 2000 05-213E/S Sunway 04-2322 7907

YFC-30 / YFC-36

CUT OFF SAW



YUH FARN

YFC-30 / YFC-36

CUT OFF SAW



▲ YFC-30



▲ YFC-36

DELAY TIMER

Once the sawblade stopswitch is pressed, the timer can control the safety door opening time. The safety door can't be opened until about 2 minutes, which may prevent the operator from touching the running sawblade.



FOUR DUST HOOD OUTLETS

The machine is equipped with 4 dust hood outlets with $\phi 5''$ diameter, providing a dramatical increase in dust suction efficiency.



SAFETY COVER(OPTIONAL)

The safety cover provides a totally enclosed safety protection. It thoroughly prevents the operator's hands from approaching the cutting area.




The luricator is used for lubricating the clamp mechanism, which effectively upgrades smoothness of clamping motions.



YFC-30 Features :

- Motion cycles are pneumaticly operated, and conveniently controlled by a foot switch. (Double hands pressing is available [optional])
- 30" sawblade (optional)
- Normal cutting thickness adjustment is made by means of a knob. Adjusting cutting size according to scale.
- Fast cutting rate up to 10~15 times per minute. Cycle speeds are adjustable.
- Picture shown left-hand model is standard. Right-hand model(optional).
- Powerful 15HP motor drive (optional: up to 20HP)
- Easy belt tension adjustment or replacement.
- Infeed and outfeed roller conveyors (optional).

YFC-30 Cutting off capacity (H x W)

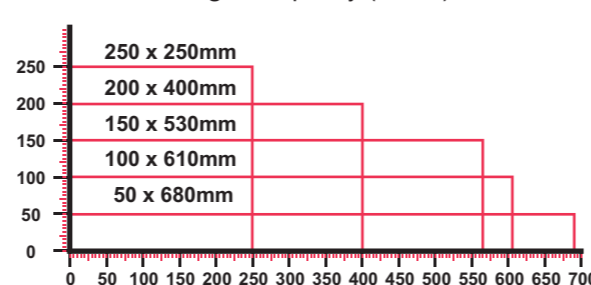

YFC-36 Features :

- The machine accommodates $\phi 36''$ sawblade for great cutting capacity.
- Cutting speed 10~15 cuts/min.
- 25HP powerful sawblade motor.
- Equipped with a delay timer for safety protection.
- Easy to adjust or replace transmission belt.
- Available to equip with powered roller conveyor table.
- Rugged machine construction for maximum stability.

YFC-36 Cutting off capacity (H x W)

